

# INDIAN CREEK BANK STABILIZATION AT BLUE JAY TRAIL

Macedonia, OH

CUYAHOGA RIVER SOUTH · INDIAN CREEK

## Summary

This project repaired an eroding streambank on Indian Creek near Blue Jay Trail in Macedonia. The channel was incised and both banks were 4 feet high and nearly vertical. The total length of the eroded bank was approximately 125 feet on the right bank and 75 feet on the left bank. The project re-graded both left and right banks and stabilized the stream using a total of 200 feet of rock channel protection at the toe and live brush layering to the top of the bank.

## Project Details


**Asset ID(s):** IC00297

**Contract Type:** Quote

**Construction Cost:** \$43,950.00

**Completed Date:** December 13, 2018

**Watershed Team Leader:** Anne Schilling (SchillingA@neorsd.org)

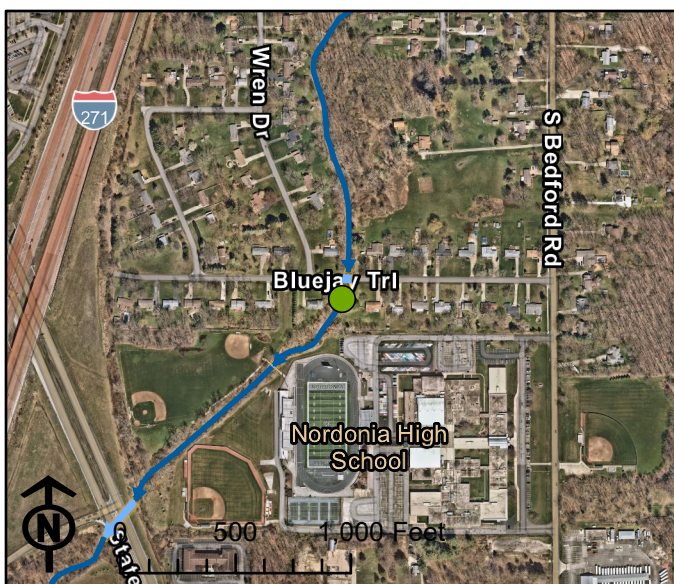

REGIONAL  
STORMWATER  
MANAGEMENT