

# BEAR CREEK BANK STABILIZATION NORTH OF MILES ROAD

North Randall, OH

CUYAHOGA RIVER SOUTH · BEAR CREEK

## Summary

This project stabilized over 90ft of eroding streambank along Bear Creek that had exposed a local stormwater outfall and concrete headwall. The eroding right bank was no longer able to support the headwall or protect the encased stormwater pipe. The bank was re-graded to a stable slope and reinforced with riprap toe protection. Live stakes and native vegetation were planted to further stabilize the new bank configuration.

## Project Details


**Asset ID(s):** BA00162

**Contract Type:** Quote

**Construction Cost:** \$33,735.00

**Completed Date:** November 3, 2020

**Watershed Team Leader:** Francisco Rivera (riveraf@neorsd.org)

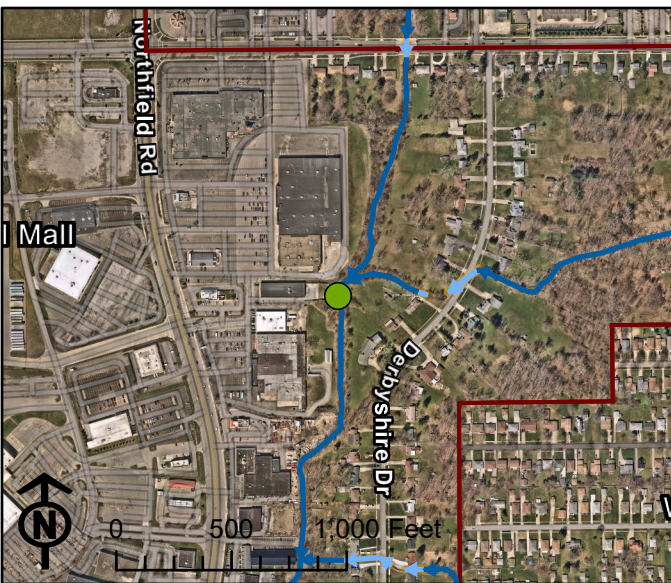

**REGIONAL  
STORMWATER  
MANAGEMENT**